TOSHIBA

Put your business in the spotlight.

t95 tw95

2,200 ANSI-lumens
Contrast 2,000:1
XGA Resolution
tw95: Wireless

- Many functions like password, panel lock and userlogo
- 2 RGB-Inputs
- 1 RGB- and 1 Audio-Output
- tw95: USB reader, wireless LAN, power zoom, auto focus

* NCE2 is an improved color optimization by Toshiba

DLP™, the DLP™-Badge are registered trademarks of Texas Instruments.

TOSHIBA

t95 tw95

Display 0.55" DMD Chip™*
Resolution XGA 1,024 x 768
Brightness 2,200 ANSI-lumens
Colour reproduction 16.7 mio. colours
Contrast 2,000:1
Projection format 4:3 switchable to 16:9
Lamp 210 W (TLPLW9LAMP)
Max. lamp life up to max. 2,000 hours/
up to max. 3,000 hours in ECO mode
Lens F = 2.07 - 2.64 / f = 20.5 - 32.8 mm wide angle
t95: manual zoom and focus
tw95: power zoom, auto focus
Zoom ratio 1.6 x (large zoom zone)
Throw ratio 1.8 - 2.8 : 1
Frequencies (hor./vert.) 15 - 120 kHz / 50 - 150 Hz
Projection front, rear and ceiling
Digital keystone correction vertical +/- 30°
Picture size (diagonal) 0.76 m - 7.62 m
Projections distance 1.07 m - 11.09 m
Input signal NTSC / PAL / SECAM 480i, 480p, 576i,
576p, 720p, 1,080i, VGA / SVGA / XGA, SXGA + UXGA (compr.)
Inputs 2 x RGB (D-sub 15), S-video, composite video (RCA),
3 x audio (2 x RCA, 1 x stereo mini jack),
tw95: USB Typ A
Outputs monitor (D-sub 15), audio (stereo mini jack)
Serial Interface RS-232C (mini DIN 8pin)
Power supply AC 100 - 240V, 50/60 Hz
Loudspeaker 1 W (mono)
Dimensions (W x H x D) 300 x 99 x 218 mm
Weight t95: 2.9 kg, tw95: 3.0 kg
Features user logo, password protection, key lock, NCE 2,
resize- and black board-function, when "Power OFF" immediately off,
ECO mode, auto V keystone correction, DDC compatible (blue terminal)
tw95: auto focus, power zoom, USB reader (type A), wireless LAN
Accesories remote control with laserpointer and batteries,
owners manual (CD ROM), audio-, S-video-, RGB- and
power cable, softcase,
tw95: WLAN card and software
Options trolley, spare lamp, camera c001, ceiling mount
Wireless communication (tw95) WLAN capable with WLAN card,
wireless LAN (IEEE802.11b/g), 64/128 bit encoding, wep+

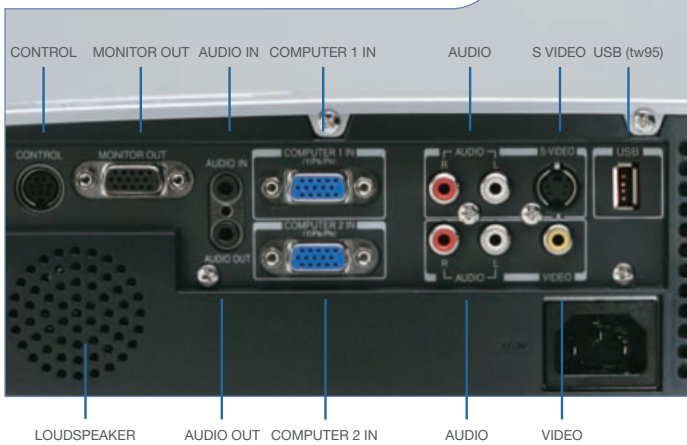

picture size (diagonal in m)	projection distance a (m)	
	min lenght (zooming max)	max lenght (zooming min)
0.76	1.07	1.75
1.02	1.45	2.35
1.52	2.19	3.55
2.03	2.93	4.74
2.54	3.67	5.93
3.81	5.53	8.92
5.08	7.38	-
6.35	9.24	-
7.62	11.09	-

Toshiba Europe GmbH
Projection & Display Technology
Phone: ++49-2131-158-01 • Fax: ++49-2131-158-835
e-mail: projektoreninfo@toshiba-teg.com

February 2006 • Subject to modifications and errors